

For commercial and industrial use

# JUDOMAT<sup>®</sup> Kompakt

Compact water softening unit

Ion exchange unit for softening of clear, iron and manganese-free drinking and process water.

**Flow rate controlled:**

Micro-processor control unit with preset volume control and automatic reset function as well as the option for time control presetting.



Display unit indicates following functions:


- Time
- Residual Capacity
- Water flow (Symbol)

Preset programming is not affected by power cuts.



CE

Model JM 30 - 100 WZ-KB

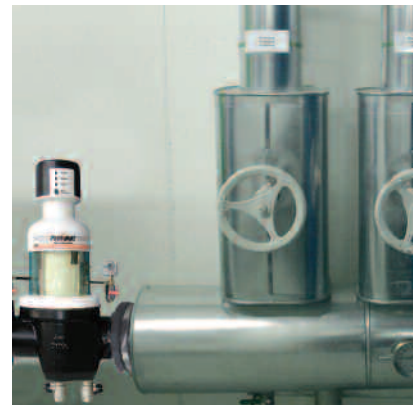

# JUDOMAT compact water softening unit JM 30 - 100 WZ-KB


## Modell JM 30 - 100 WZ-KB

### Version:

Aesthetically designed cabinet unit, integrated resin chamber PN10 made of fibreglass strengthened polyester with PVC-based injector units turbine water meter, central control unit for regeneration control and 1" connection fixture, high quality, food level monospheric ion-exchange resin, brine and salt storage containers as well as brine suction tubing integrated into central housing unit, microprocessor controls. Power requirements 230 V/50 Hz (US models excepted).

Type	JM 30 WZ-KB	JM 45 WZ-KB	JM 60 WZ-KB	JM 100 WZ-KB
Max flow rate m <sup>3</sup> /h	1	1,5	2	3
Pipe connection	1"	1"	1"	1"
Capacity at regen. °dH x m <sup>3</sup>	30	45	60	100
Salt consumption per regen. kg	2	3	4	6
Brine and salt storage volume l	21	21	50	50
Dimensions	length mm	655	655	655
	width mm	390	390	390
	height mm	625	625	1.085
Order No.	8390112	8390113	8390114	8390115

We carry JUDO-products in stock

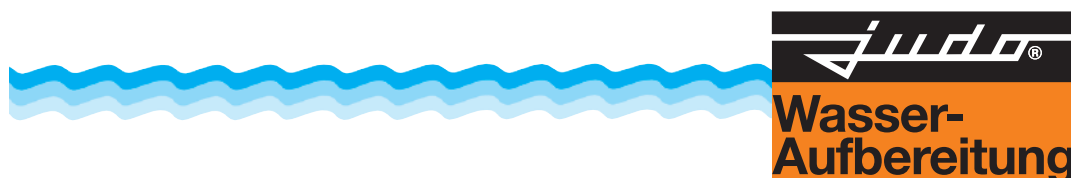

JUDO Wasseraufbereitung GmbH  
P.O.Box 380 · D-71351 Winnenden  
Germany  
Tel. +49 (0)7195 / 692-0  
Fax +49 (0)7195 / 692-110  
E-Mail: [export@judo.eu](mailto:export@judo.eu) · [www.judo.eu](http://www.judo.eu)